



How to Make a Battery Holder




Materials: tape, rubber band, batteries, wires, tin foil, strip of paper

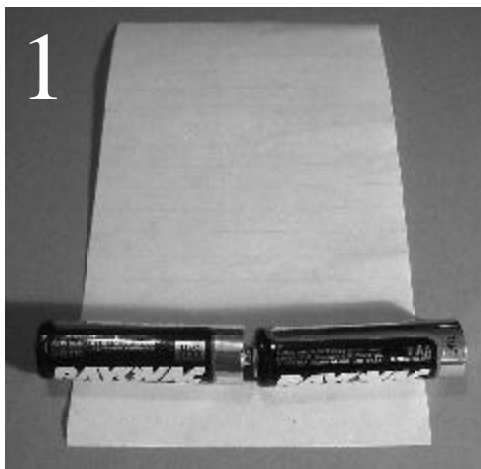

1. Put the batteries on the strip of paper and roll them up.

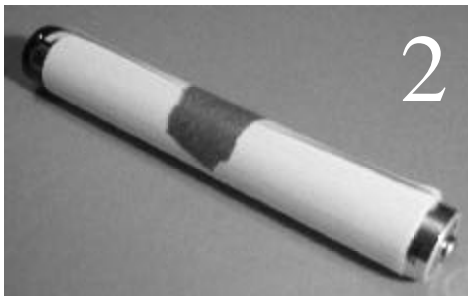

2. Fasten with tape

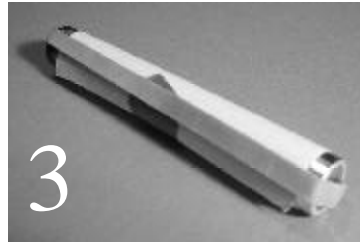

3. Stretch the rubber band around the ends of the batteries.




4. Wrap tape around near each end, to hold the rubber band.



5. The wire should be stripped so that the bare end is about an inch long.



6. Lay the bare end on a strip of tin foil.

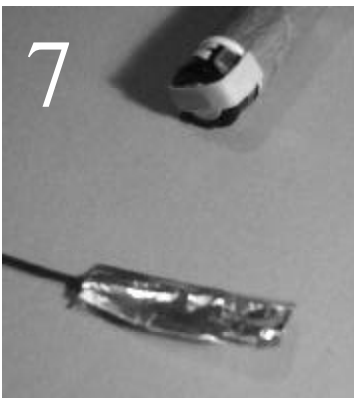

7. Roll it up or fold it again and again to make a little flat package.



8. Fold the package in half so that the wire inside is also bent in half, to keep it secure.



9. Tuck the foil under the rubber band. Repeat for the other end of the battery.

To hook up just one battery, use a smaller rubber band and you don't need to roll it up in paper .